

## Features

- Pressure-balance diaphragm technology provides reliable anti scald protection and maintains mixed water temperature within +/- 3 degrees Fahrenheit.
- Maximum flow rate of 13.0 gpm at 45psi - ideal for multiple outlet shower installations or rapid bath filling.
- 3/4" NPT connections.
- Integral shutoff valve stops.
- Adjustable high-temperature limit stop to control maximum water temperature.
- Deep rough-in kits are available – refer to individual trim design.
- Requires valve trim (sold separately).

## Material

- Forged brass construction.

## Installation

- Cartridge is reversible for installations where hot and cold supplies are reversed.
- Requires K-9663 twin ell (sold separately) when using a diverter spout.

## Required Products/Accessories

K-9663

## Recommended Products/Accessories

88526 Thin Wall Trim Kit




## Codes/Standards

ASME A112.18.1/CSA B125.1  
ASSE 1016/ASME A112.1016/CSA B125.16

## KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

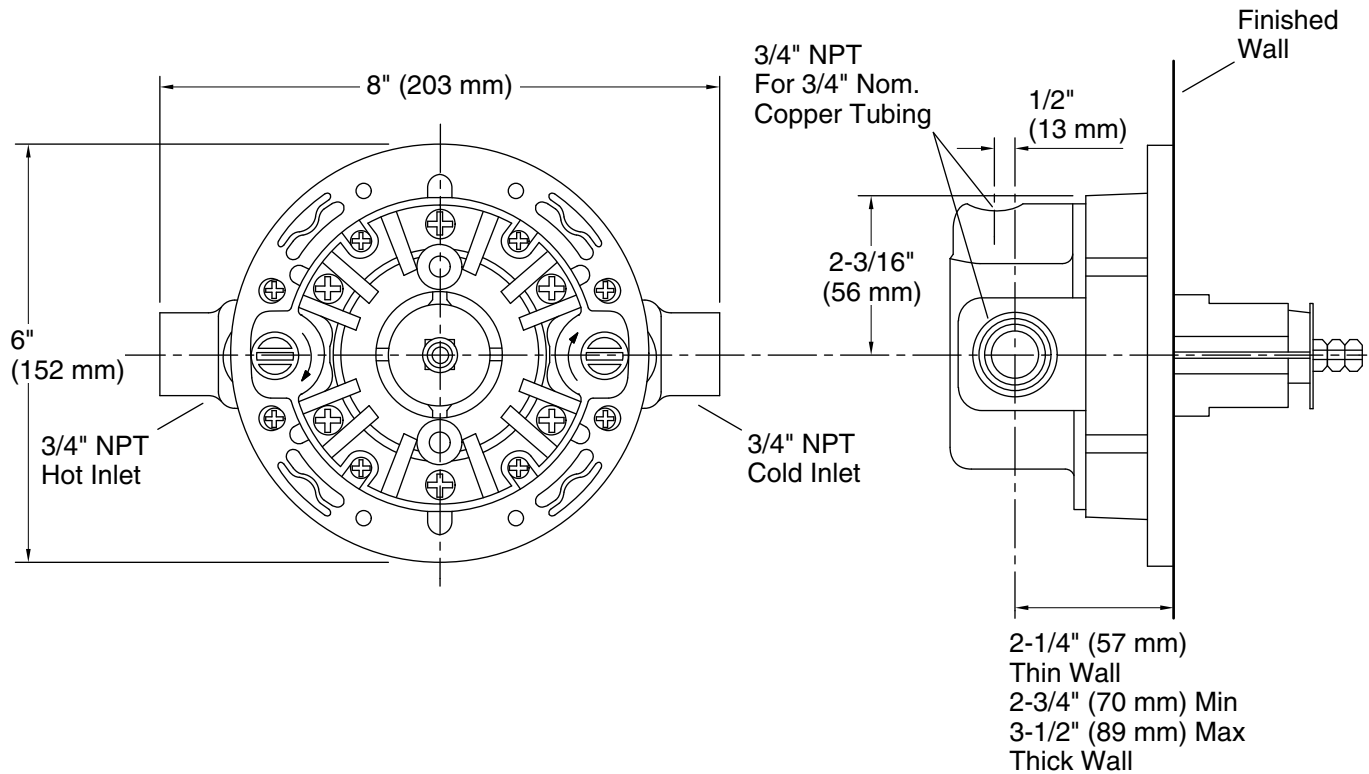

### Technical Information

All product dimensions are nominal.

#### Shower Valve:

Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Minimum (Operating) Pressure:	15 psi (1 bar)

### Notes

Install this product according to the installation guide.

**CAUTION:** Risk of product damage. When using this valve in a fiberglass or acrylic installation, use the thin wall installation kit 88526 (sold separately).

For installations with a diverter spout, a twin ell, K-9663 (sold separately), is required between the valve and the spout.

Avoid cross-flow conditions. Do not install shut-off device on either valve outlet.