


- | | | | |
|--|--|--|--|
| R89-1NCBG Finish(BG) <input type="checkbox"/> | R89-1NCC Finish(C) <input type="checkbox"/> | LG89-7NCC Finish(C) <input type="checkbox"/> | LG89-8NCC Finish(C) <input type="checkbox"/> |
| R89-1NCB Finish(B) <input type="checkbox"/> | R89-1NCK Finish(K) <input type="checkbox"/> | LG89-7NCK Finish(K) <input type="checkbox"/> | LG89-8NCK Finish(K) <input type="checkbox"/> |
| LG89-7NCBG Finish(BG) <input type="checkbox"/> | LG89-8NCBG Finish(BG) <input type="checkbox"/> | LG89-7NCB Finish(B) <input type="checkbox"/> | LG89-8NCB Finish(B) <input type="checkbox"/> |
| LG89-7NCB Finish(B) <input type="checkbox"/> | LG89-8NCB Finish(B) <input type="checkbox"/> | LG89-7NCK Finish(K) <input type="checkbox"/> | LG89-8NCK Finish(K) <input type="checkbox"/> |

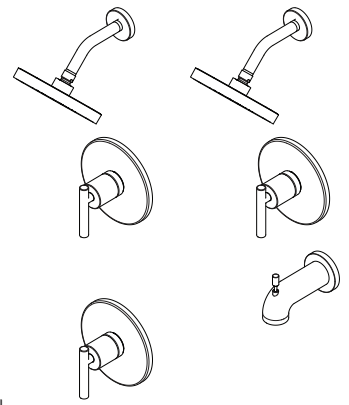

Specifications

- Trim Only, Valve Not Included

Features

- 1.8 GPM Flow Rate (Showerhead)
- Brass Ball Joint
- PVD Finish (K Finish Only)
- Raincan Showerhead
- Temperature Control Only
- Secure Pfit™ with Anti Handle Wobble
- Tub & Shower Trim (8NC)
- Shower Only Trim (7NC)
- Valve Trim Only (1NC)
- Requires OX8/JX8 Valve (Sold Separately)
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- Cal Green Compliant
- CEC Compliant
- EPA WaterSense Certification 1.8 gpm, 6.8 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

