


Pull Down Kitchen Faucet

GT529-IHC Finish(C)

GT529-IHB Finish(B)

GT529-IHK Finish(K)

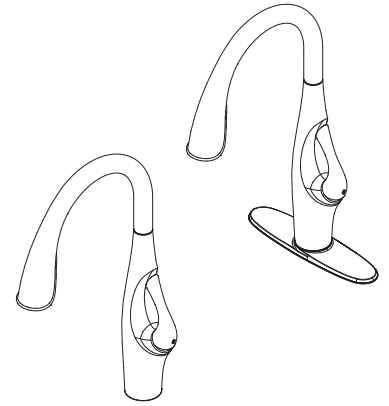

Specifications

- Concealed Sprayhead
- Pforever Seal

Features

- 1.8 GPM Flow Rate
- 3 Function Pull-Down Sprayer (Pause, Spray, Stream)
- 68" Hose
- Concealed Sprayhead
- High Arc Spout
- Optional Soap Dispenser
- Optional Deckplate
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®



Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A171.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



Dimensions

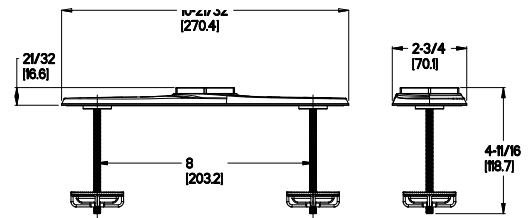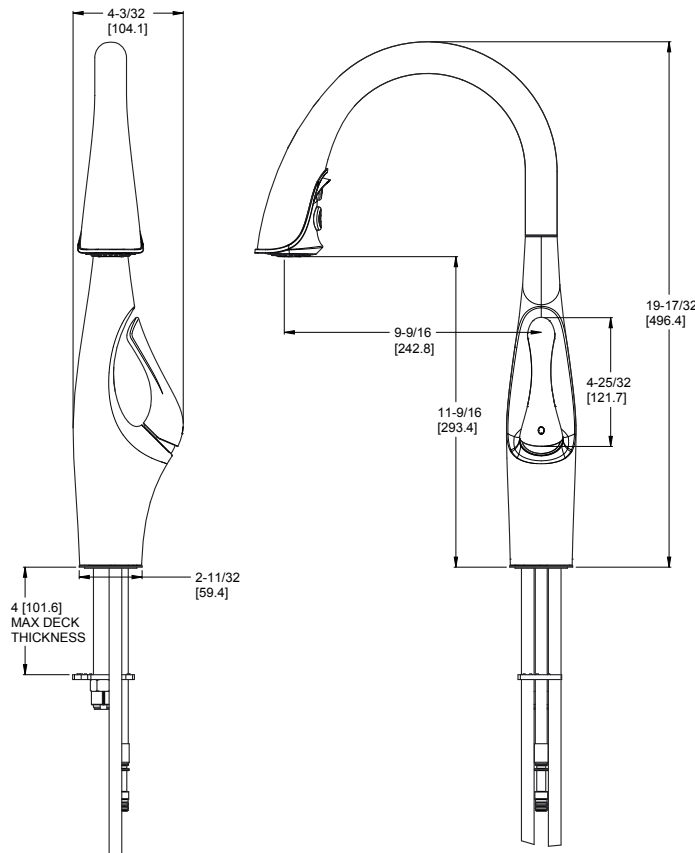

Optional Deckplate

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings