


- | | | | |
|---|--|--|--|
| R89-1TBC Finish(C) <input type="checkbox"/> | R89-1TBK Finish(K) <input type="checkbox"/> | LG89-7TBK Finish(K) <input type="checkbox"/> | LG89-8TBK Finish(K) <input type="checkbox"/> |
| R89-1TBD Finish(D) <input type="checkbox"/> | R89-1TBY Finish(Y) <input type="checkbox"/> | LG89-7TBY Finish(Y) <input type="checkbox"/> | LG89-8TBY Finish(Y) <input type="checkbox"/> |
| R89-1TBBG Finish(BG) <input type="checkbox"/> | LG89-7TBBG Finish(BG) <input type="checkbox"/> | LG89-8TBBG Finish(BG) <input type="checkbox"/> | |

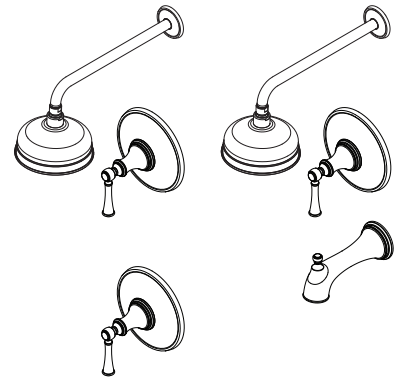

Specifications

- SecurePfit™
- Trim Only, Valve Not Included

Features

- 1.8 GPM Flow Rate (Showerhead)
- All Metal Construction
- SecurePfit™ with Anti Handle Wobble
- Brass Ball Joint
- Requires OX8/JX8 Valve (Sold Separately)
- Raincan Showerhead
- Valve Trim Only (1TB Only)
- Shower Only (7TB Only)
- Tub & Shower (8TB Only)
- Trim Only, Valve Not Included
- Easy To Clean Nozzles
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- EPA WaterSense Certification 1.8 gpm, 6.8 L/Min



Dimensions

