


- LG42-TBOC Finish(C)
- LG42-TBOD Finish(D)
- LG42-TBOK Finish(K)
- LG42-TBOY Finish(Y)
- LG42-TBOBG Finish(BG)

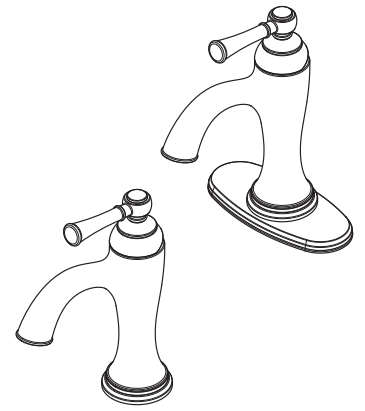

- 1 or 3-Hole Installation
- All Metal Construction
- Pforever Seal

## Specifications

### Features

- 1.2 GPM Flow Rate
- All Metal Construction
- 1 or 3-Hole Installation
- Optional Deckplate, Order 961-223\*
- Metal Pop-Up Rod
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)



## Dimensions

